



The ViewSonic WorkPro Collection

Your Workspace. Your Way.

Table of Contents

The ViewSonic WorkPro Collection	03
Designed for better workspaces	04
Mainstream Monitors	05
QHD Monitor with Intelligent Sensing Features	11
▶ Intelligent Sensing Features	13
USB-C Monitors	14
Docking Monitors with Daisy Chain	17
USB-C Video Conferencing Monitors	19
Premium Video Conferencing Docking Monitors	21
Ultrawide & Curved Monitors	23
USB-C Portable Monitors	26
Touchscreen Monitors	28
▶ Infrared Touch Technology (IR)	29
▶ Projected Capacitive Touch Technology (PCAP)	31
Essential Monitors	35
Why ViewSonic	
▶ Trusted Worldwide for Quality, Innovation, and Customer Care	43
▶ Committed to Sustainable Solutions	44



The ViewSonic WorkPro Collection

Your Workspace. Your Way.

The ViewSonic WorkPro Collection is built for today's professionals, delivering flexible setups and personalized options that fit any environment, whether in the office, at home, or in shared spaces, all while helping teams work smarter and more efficiently.

A Monitor for Every Need



**VG Series
Business**

- USB-C Connectivity
- Ergonomic Design
- Green Packaging



**TD Series
Multi-touch**

- Infrared Touch
- PCAP Touch



**VA Series
Home and Office**

- Multiple Connectivity
- Resolution Options
- Best Value Performance

Key Benefits



**Setup
Simplicity**



**Workflow
Flexibility**



**Increased
Productivity**

Disclaimer: Features shown are representative and may vary by model or region. Please refer to individual product specifications for details.

Designed for Better Workspaces

Essential features that simplify setup, support comfort, and boost productivity:



USB Type-C Docking

Simplify desk setup and reduce cable clutter with a one cable solution. USB Type-C docking supports power delivery, high-speed data transfer, and audio/video output, helping users stay organized and productive throughout the day.




Built-In Intelligent Sensors

Improve workplace safety and comfort with intelligent sensing features. Posture check, privacy alerts, and multi-person detection combine to create a more secure and productive environment.



Cross-Platform Ready

Connect seamlessly across diverse IT environments with multi-OS support. Compatibility with macOS, Windows, and more provides flexibility for different workflows and device setups.



Ergonomic Design

Enhance workstation comfort with a fully adjustable design. Height, tilt, swivel, and pivot options allow personalized setups that support healthy posture and reduce strain throughout the day.



Eye ProTech

Reduce eye strain during long hours with advanced protection features. Blue light filtering, low blue light panels, and flicker-free technology help maintain comfort and focus through extended workdays.

The VG Series at a Glance

Monitors designed for comfort, clarity, and care

The VG Series is purpose-built for professionals, combining ergonomic flexibility, sharp visual clarity, and eco-conscious design to deliver reliable performance, greater comfort, and smarter sustainability in the modern workplace.



5-Year Warranty


ViewSonic offers a 5-year warranty, ensuring peace of mind with extended product reliability.

*Available in selected Western European countries. Check local terms for details.



ISO Pixel Class 1 Certified

The VG Series meets the highest panel quality standards for exceptional image clarity, accuracy, and visual consistency.



Ergonomic Flexibility

Height, tilt, swivel, and pivot adjustments allow customized setups that improve comfort and productivity.



Eco-Friendly, Biodegradable Packaging

Made from 100% recyclable materials with reduced plastic and mono-color printing to simplify responsible disposal.



Certified Energy Efficient

These monitors comply with ENERGY STAR®, EPEAT®, and TCO standards to support energy savings and ESG-aligned procurement.

Disclaimer: Certification standards and packaging practices may vary by model. Please refer to individual product specifications for accurate details on applicable certifications and eco-friendly packaging.

[Explore more for VG products](#)

Specifications

Mainstream Monitors



MODEL NAME	VG2208A	VG2408A
Size / Panel Type	22" IPS	24" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1,000:1	1,300:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	5ms / 100Hz	5ms / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 77% size sRGB: 108% size / 99% coverage
Low Blue Light	Software solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	HDMI 1.4: 1 / DisplayPort: 1	VGA: 1 / HDMI 1.4: 1 / DisplayPort: 1
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2	2Watts x2
Consumption (typical)	14W	16W
ECO Mode (Conserve / Optimized)	10W / 12W	12W / 14W
Ergonomic Design	Height Adjust (mm): 100 Swivel: 340° Tilt (Forward/Back): -3.5° / 23° Pivot (Right/Left): 90° / 0°	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -4° / 28° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	492.86 x 358.32-458.32 x 204.31	542 x 386.2-516.2 x 223
Dimensions (Without stand) (mm)	492.86 x 286.48 x 43.01	542 x 323 x 44
Net Weight (kg)	3.8	5.2
Net Weight (without stand) (kg)	2.2	3.2
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO

Specifications

Mainstream Monitors



MODEL NAME	VG2408A-MHD	VG2448a-2
Size / Panel Type	24" IPS	24" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1,300:1	1,300:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	5ms / 100Hz	5ms / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 77% size sRGB: 108% size / 99% coverage
Low Blue Light	Hardware solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 / HDMI 1.4: 1 / DisplayPort: 1	VGA: 1 / HDMI 1.4: 1 / DisplayPort: 1
Audio In / Out	3.5mm Audio Out: 1	N/A
USB Hub	N/A	USB 3.2 Type A Down Stream: 4 USB 3.2 Type B Up Stream: 1
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2	2Watts x2
Consumption (typical)	16W	17.8W
ECO Mode (Conserve / Optimized)	12W / 14W	13.5W / 15.4W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -4° / 28° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 130 Swivel: 120° Tilt (Forward/Back): -5° / 40° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	542 x 386.2-516.2 x 223	539 x 406.19-511.9 x 202
Dimensions (Without stand) (mm)	542 x 323 x 44	539 x 320 x 52
Net Weight (kg)	5.2	5.9
Net Weight (without stand) (kg)	3.2	3.4
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO

Specifications

Mainstream Monitors



MODEL NAME	VG2748a-2	VG2708A
Size / Panel Type	27" IPS	27" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1,300:1	1,300:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	5ms / 100Hz	5ms / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
Color Gamut (Typ.)	NTSC: 76% size sRGB: 108% size / 99% coverage	NTSC: 77% size sRGB: 111% size / 99% coverage
Low Blue Light	Hardware solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 / HDMI 1.4: 1 / DisplayPort: 1	VGA: 1 / HDMI 1.4: 1 / DisplayPort: 1
Audio In / Out	N/A	3.5mm Audio Out: 1
USB Hub	USB 3.2 Type A Down Stream: 4 USB 3.2 Type B Up Stream: 1	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2	2Watts x2
Consumption (typical)	23W	19W
ECO Mode (Conserve / Optimized)	16.2W / 19.2W	14W / 16W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 120° Tilt (Forward/Back): -5° / 40° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -4° / 28° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	612 x 401.19-533.24 x 202	615 x 407.38-537.38 x 223
Dimensions (Without stand) (mm)	612 x 362 x 52	615 x 364 x 46
Net Weight (kg)	7	6.1
Net Weight (without stand) (kg)	4.6	4.1
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO

Specifications

Mainstream Monitors



MODEL NAME	VG2708A-MHD	VG2708-4K
Size / Panel Type	27" IPS	27" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	3840 x 2160 / 16:9
Static Contrast Ratio (Typ.)	1,300:1	1,200:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	360 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	5ms / 100Hz	4ms / 60Hz
Color Space Support	8 bit (6 bit + FRC)	10 bit (8 bit + FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 77% size sRGB: 128% size / 100% coverage
Low Blue Light	Hardware solution	Software solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 / HDMI 1.4: 1 / DisplayPort: 1	HDMI 2.0 (with HDCP 2.2): 2 / DisplayPort: 1
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	N/A	N/A
Power In	3-pin Socket (IEC C14 / CEE22)	DC Socket (Center Positive)
Speaker	2Watts x2	N/A
Consumption (typical)	19W	40W
ECO Mode (Conserve / Optimized)	14W / 16W	25W / 33W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -4° / 28° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -3.5° / 28° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	615 x 407.38-537.38 x 223	613.8 x 408-538 x 233.18
Dimensions (Without stand) (mm)	615 x 364 x 46	613.8 x 365.87 x 52.8
Net Weight (kg)	6.1	6.7
Net Weight (without stand) (kg)	4.1	4.6
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO

Specifications

Mainstream Monitors



MODEL NAME	VG2709-2K-MHD-2	VG3208-4K
Size / Panel Type	27" IPS	32" VA
Resolution (Max.) / Ratio	2560 x 1440 / 16:9	3840 x 2160 / 16:9
Static Contrast Ratio (Typ.)	1,000:1	3,000:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	350 cd/m ²	300 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	4ms / 100Hz	4ms / 60Hz
Color Space Support	8 bit true	8 bit true
Color Gamut (Typ.)	NTSC: 83% size sRGB: 117% size / 99% coverage	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	HDMI 2.0: 2 / DisplayPort: 1	HDMI 2.0 (with HDCP 2.2): 2 / DisplayPort: 1
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	N/A	N/A
Power In	3-pin Socket (IEC C14 / CEE22)	DC Socket (Center Positive)
Speaker	2.5Watts x2	N/A
Consumption (typical)	23W	40W
ECO Mode (Conserve / Optimized)	18W / 22W	25W / 33W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -3.5° / 28° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 90 Swivel: 360° Tilt (Forward/Back): -4° / 20°
Dimensions (mm)	613.8 x 408-538 x 233.18	714.3 x 456-546 x 213
Dimensions (Without stand) (mm)	613.8 x 365.87 x 52.8	714.3 x 427.48 x 59.22
Net Weight (kg)	6.7	7.9
Net Weight (without stand) (kg)	4.6	5.5
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT



QHD Monitor with Intelligent Sensing Features

High-resolution visuals with built-in comfort

The VG2748A-2K delivers sharp QHD resolution with 7 intelligent sensing features that adapt to the workspace and enhance comfort, privacy, and efficiency. It combines high visual performance with advanced eco-efficiency, reducing energy use without compromising productivity.



QHD Visual Clarity

Sharp 2K QHD (2560x1440) resolution provides extra screen space and crystal-clear detail, simplifying multitasking, project planning, and advanced workflows.



Comfort, Privacy, and Energy Savings

Powered by a built-in sensor, seven adaptive modes improve productivity, privacy, and comfort while saving energy and supporting healthier work habits.



Full Connectivity Hub

USB-A, USB-B, and USB-C ports (15W PD), plus HDMI, DisplayPort, and VGA inputs simplify device integration and keep workspaces organized.

Learn more about how VG2748A-2K support workplace sustainability:
[Eco-Friendly Monitors for Business: Supporting ESG and Sustainability Goals](#)

QHD Monitor with Intelligent Sensing Features



MODEL NAME	VG2748A-2K
Size / Panel Type	27" IPS
Resolution (Max.) / Ratio	2560 x 1440 / 16:9
Static Contrast Ratio (Typ.)	1,300:1
Dynamic Contrast Ratio	50M:1
Brightness (Typ.)	350 cd/m ²
Viewing Angle	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	5ms / 100Hz
Color Space Support	8 bit true
Color Gamut (Typ.)	NTSC: 76% size sRGB: 108% size / 99% coverage
Low Blue Light	Hardware solution
Flicker Free	Yes
Connectivity	VGA: 1 / HDMI 2.0: 1 / DisplayPort: 1
Audio In / Out	N/A
USB Hub	USB 3.2 Type A Down Stream: 3 USB 3.2 Type B Up Stream: 1 USB 3.2 Type C Down stream: 1 (15W power charger)
Power In	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2
Consumption	33W
ECO Mode (Conserve / Optimized)	25.1W / 28.5W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 120° Tilt (Forward/Back): -5° / 40° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	613.38 x 406.19-533.75 x 202.18
Dimensions (Without stand) (mm)	613.38 x 362.73 x 51.5
Net Weight (kg)	7.1
Net Weight (without stand) (kg)	4.8
VESA Compatible (mm)	100 x 100
Environmental Standards	Energy Star, EPEAT



Intelligent Sensing Features

The VG2748A-2K's 7 intelligent sensing features adapt to workplace settings and habits to reduce eye strain, protect sensitive data, and save energy. In offices, at home, or in shared spaces, these features encourage healthier habits, sustained focus, and more productive workdays.



Ambient Light Sensor

Adjusts screen brightness to surrounding light, reducing eye strain and keeping visuals clear all day.



Auto-Dimmer

Lowers brightness when not in use, enhancing privacy, reducing distractions, and saving energy.



Privacy Alert

Warns when another person is viewing the screen, protecting sensitive content in shared spaces.



Power Saving Mode

Dims the backlight when not in use, reducing energy consumption and lowering costs for a more sustainable workspace.



Break Reminder

Tracks screen time and sends reminders to take breaks, reducing fatigue and supporting healthier work habits.



Posture Check

Provides gentle reminders to sit well, encouraging better ergonomics and reducing strain during long hours.



Focused Attention Mode

Moves the pointer or active window automatically to the screen being viewed, enabling faster work across multiple displays.

USB-C Monitors


New Generation Display Connectivity

The ViewSonic USB-C monitors simplify workstation setup. A single USB-C connection delivers power, video, audio, and data, saving time and eliminating excess cables. Models such as the VG2409-MH DU-2, VG2709-2K-MH DU-2, and VG2756-4K provide the performance and convenience professionals need, whether working from home, in the office, or across shared workspaces.



One-Cable USB-C Setup

USB-C delivers power, audio, video, and data through a single cable for a neater, more efficient desk.



Ergonomic Comfort

Full-function stand with tilt, swivel, pivot, and height adjustment supports all-day comfort.



Full Connectivity Hub

Multiple ports, including USB and HDMI, connect a wide range of devices easily without the need for adapters.

Learn how USB-C monitors can simplify workspaces:

[Unlocking Productivity: Docking Monitors for Seamless Workstation Integration](#)



Specifications USB-C Monitors



MODEL NAME	VG2409-MHDU-2	VG2709-2K-MHDU-2
Size / Panel Type	24" IPS	27" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	2560 x 1440 / 16:9
Static Contrast Ratio (Typ.)	1,300:1	1,000:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	350 cd/m ²	350 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	4ms / 100Hz	4ms / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit true
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	HDMI 1.4: 1 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (65W power charger)	HDMI 2.0 (with HDCP 2.2): 1 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (98W power charger)
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2.5Watts x2	2.5Watts x2
Consumption (typical)	22W	22.3W
ECO Mode (Conserve / Optimized)	18W / 20W	16.2W / 19.1W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -3.5° / 28° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -3.5° / 28° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	539.7 x 389.89-519.89 x 233.29	613.8 x 408-538 x 233.29
Dimensions (Without stand) (mm)	539.7 x 323.18 x 50.9	613.8 x 365.8 x 51
Net Weight (kg)	5.6	6.7
Net Weight (without stand) (kg)	3.5	4.4
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO

USB-C Monitors



MODEL NAME	VG2756-4K
Size / Panel Type	27" IPS
Resolution (Max.) / Ratio	3840 x 2160 / 16:9
Static Contrast Ratio (Typ.)	1,000:1
Dynamic Contrast Ratio	80M:1
Brightness (Typ.)	350 cd/m ²
Viewing Angle	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	5ms / 60Hz
Color Space Support	10 bit (8 bit + A-FRC)
Color Gamut (Typ.)	NTSC: 77% size sRGB: 109% size / 100% coverage
Low Blue Light	Software solution
Flicker Free	Yes
Connectivity	HDMI 2.0 (with HDCP 2.2): 1 DisplayPort: 1 Ethernet LAN (RJ45): 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (90W power charger)
Audio In / Out	N/A
USB Hub	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1
Power In	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2
Consumption	26.35W
ECO Mode (Conserve / Optimized)	16.81W / 21.12W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 120° Tilt (Forward/Back): -5° / 40° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	612 x 406.19-533.24 x 202
Dimensions (Without stand) (mm)	612 x 362 x 52
Net Weight (kg)	7.5
Net Weight (without stand) (kg)	5.1
VESA Compatible (mm)	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO



Docking Monitors with Daisy Chain


Dual-monitor support with simplified connectivity

The ViewSonic VG09U Series Docking Monitors simplifies modern workstations. With built-in docking, DisplayPort daisy chain, Ethernet, and USB-C power delivery, they replace separate docks and reduce cable clutter, making dual-monitor setups easy and efficient. Whether adding a second screen at a fixed desk or connecting a laptop at home, VG09U monitors keep professionals productive and connected.



Clean Dual Monitor Setup

DisplayPort daisy chain allows a second monitor to connect with just one cable, keeping workstations simple and efficient.



Integrated Docking Station

Ethernet and USB-C ports eliminate the need for a separate dock, keeping desks clear of clutter and connections simple.



One-Cable USB-C Setup

USB-C delivers power, audio, video, and data through a single cable for a neater, more efficient desk.

Learn more about how USB-C docking monitors can transform workspaces:
[Unlocking Productivity: Docking Monitors for Seamless Workstation Integration](#)

Specifications

Docking Monitors with Daisy Chain



MODEL NAME	VG2409U-2	VG2709U-2K
Size / Panel Type	24" IPS	27" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	2560 x 1440 / 16:9
Static Contrast Ratio (Typ.)	1,300:1	1,000:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	350 cd/m ²	350 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	4ms / 100Hz	4ms / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit true
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	HDMI 1.4: 1 DisplayPort: 1 DisplayPort Out: 1 Ethernet LAN (RJ45): 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (65W power charger)	HDMI 2.0 (with HDCP 2.2): 1 DisplayPort: 1 DisplayPort Out: 1 Ethernet LAN (RJ45): 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (98W power charger)
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2.5Watts x2	2.5Watts x2
Consumption (typical)	15.5W	22.3W
ECO Mode (Conserve / Optimized)	12W / 13.5W	16.2W / 19.1W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -3.5° / 28° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -3.5° / 28° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	539.7 x 389.89-519.89 x 233.29	613.8 x 408-538 x 233.29
Dimensions (Without stand) (mm)	539.7 x 323.18 x 50.9	613.8 x 365.8 x 51
Net Weight (kg)	5.6	6.7
Net Weight (without stand) (kg)	3.5	4.4
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO



VG41V Series USB-C Video Conferencing Monitors

Windows Hello-certified webcam

The VG41V is purpose-built for professional video conferencing without extra equipment. With a built-in webcam, microphone, speakers, Windows Hello login, and USB-C connection, it ensures secure calls and a clean workspace. Whether in the office or working remotely, this monitor keeps communication clear and connections reliable.



Windows Hello for Secure Hassle-free Login

Facial recognition login replaces passwords, preventing visual hacking and speeding up access.



All-in-One Video Conferencing

5MP webcam with tilt, dual mics, and speakers ensures clear communication, plus a slide cover for privacy.



Flexible Connectivity

USB-C upstream supports video, audio, and data, while USB-C and USB-A downstream ports enable quick charging and connectivity.

Specifications

Video Conferencing Monitors



MODEL NAME	VG2441V	VG2741V-2K
Size / Panel Type	24" IPS	27" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	2560 x 1440 / 16:9
Static Contrast Ratio (Typ.)	1,500:1	1,500:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	4ms / 120Hz	4ms / 120Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit (6 bit + Hi-FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	DCI-P3: 85% coverage NTSC: 85% size sRGB: 120% size
Low Blue Light	Hardware solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	HDMI 1.4: 1 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1	HDMI 2.0: 1 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	USB 3.2 Type A Down Stream: 2 USB 3.2 Type C Down stream: 1 (15W power charger)	USB 3.2 Type A Down Stream: 2 USB 3.2 Type C Down stream: 1 (15W power charger)
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2	2Watts x2
Consumption (typical)	19W	25W
ECO Mode (Conserve / Optimized)	12W / 16W	17W / 21W
Additional Hardware	Webcam: 5.0M pixel Microphone: Yes	Webcam: 5.0M pixel Microphone: Yes
Ergonomic Design	Height Adjust (mm): 150 Swivel: 90° Tilt (Forward/Back): -5° / 20° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 150 Swivel: 90° Tilt (Forward/Back): -5° / 20° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	539.8 x 386.1-529.4 x 206.1	613.3 x 400.9-550.9 x 206.1
Dimensions (Without stand) (mm)	539.8 x 346.9 x 58.6	613.3 x 388.7 x 59.2
Net Weight (kg)	4.5	5.3
Net Weight (without stand) (kg)	2.9	3.7
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT	Energy Star, EPEAT



VG57V Series Premium Video Conferencing Docking Monitor

Secure, certified, and purpose-built for professional collaboration

The ViewSonic VG57V Series is designed for reliable video conferencing in both office and remote environments. With Zoom® Certification and Windows Hello compatibility, these monitors combine security, performance, and convenience. Integrated webcams, speakers, and microphones deliver a professional all-in-one solution for clear communication and seamless collaboration.



Windows Hello for Secure Login

Facial recognition login replaces passwords, preventing visual hacking and speeding up access.



Zoom® Certified Webcam

5MP pop-up camera with fill light, microphone, and speakers ensures clear calls and high-quality meetings.



Integrated Docking Station

Ethernet and USB-C ports eliminate the need for a separate dock, keeping desks neat and connections simple.

Learn more on how to build a complete video conferencing setup:
[The Best Video Conferencing Setup – A Complete Guide](#)

Specifications

Video Conferencing Docking Monitors



MODEL NAME	VG2757V-2K	VG3457CV
Size / Panel Type	27" IPS	34" VA
Resolution (Max.) / Ratio	2560 x 1440 / 16:9	3440 x 1440 / 21:9
Static Contrast Ratio (Typ.)	1,300:1	3,000:1
Dynamic Contrast Ratio	80M:1	80M:1
Brightness (Typ.)	350 cd/m ²	350 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	5ms / 100Hz	5ms / 100Hz
Curvature	Flat	1500R
Color Space Support	8 bit true	10 bit (8 bit + FRC)
Color Gamut (Typ.)	NTSC: 76% size sRGB: 108% size / 100% coverage	NTSC: 85% size sRGB: 120% size
Low Blue Light	Hardware solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	HDMI 2.0: 1 DisplayPort: 1 DisplayPort Out: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (90W power charger) Ethernet LAN (RJ45): 1	HDMI 2.0: 1 DisplayPort: 1 Ethernet LAN (RJ45): 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (100W power charger)
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	USB 3.1 Type C - Downstream: 1 (15W power charger) USB 3.2 Type A Down Stream: 3	USB 3.2 Type A Down Stream: 4 USB 3.2 Type C Down Stream: 1 (15W power charger)
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	5Watts x2	5Watts x2
Consumption (typical)	29.77W	35W
ECO Mode (Conserve / Optimized)	24.36W / 26.75W	25W / 30W
Additional Hardware	Webcam: 5.0M pixel Microphone: Yes	Webcam: 5.0M pixel Microphone: Yes
Ergonomic Design	Height Adjust (mm): 110 Swivel: 120° Tilt (Forward/Back): -5° / 40° Pivot (Right/Left): 90° / 90°	Height Adjust (mm): 110 Swivel: 120° Tilt (Forward/Back): -5° / 40°
Dimensions (mm)	612.7 x 423.38-533.38 x 217.24	808 x 423.7-533.7 x 236.2
Dimensions (Without stand) (mm)	612.7 x 390.15 x 56.9	808 x 391.3 x 115
Net Weight (kg)	8	9.5
Net Weight (without stand) (kg)	5.5	7
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO



Ultrawide & Curved Monitors


33% more screen real estate for productive workflows

The ViewSonic Ultrawide and Curved Monitor Series is designed for professionals who need more space to work and greater comfort to focus. With displays up to 38" and a 21:9 aspect ratio, these monitors offer 33% more screen real estate than 16:9 models, replacing dual setups and making it easier to compare data, edit content, and manage tasks efficiently. Models such as the VG3419C-2, VG3456C, VA3420C, and VA3820C support tasks ranging from spreadsheets to timelines to video meetings.



21:9 Aspect Ratio for Multitasking

Up to 38" ultrawide screens provide one-third more screen space than standard displays, ideal for side-by-side work.



Curvature for Comfort

Curved screens match the natural human field of view, reducing eye movement and eye strain to support better focus during long sessions.



One-Cable USB-C Setup

USB-C delivers power, audio, video, and data through a single cable for a neater, more efficient desk.

Learn more about how to make the most of your ultrawide monitor:
[5 Ways Ultrawide Curved Monitors Can Boost Your Business Productivity](#)

Specifications

Ultrawide & Curve Monitors



MODEL NAME	VG3419C-2	VG3456C
Size / Panel Type	34" VA	34" VA
Resolution (Max.) / Ratio	3440 x 1440 / 21:9	3440 x 1440 / 21:9
Static Contrast Ratio (Typ.)	3,000:1	3,000:1
Dynamic Contrast Ratio	80M:1	80M:1
Brightness (Typ.)	300 cd/m ²	400 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Curvature	1500R	1500R
Response Time / Refresh Rate	3.5ms (Typical GTG) / 120Hz	5ms (Typical GTG) / 100Hz
Color Space Support	8 bit true	8 bit (6 bit + FRC)
Color Gamut (Typ.)	NTSC: 75% size sRGB: 105% size	NTSC: 75% size sRGB: 106% size / 99% coverage
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	HDMI 2.0: 1 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (96W power charger) Ethernet LAN (RJ45): 1	HDMI 2.0: 2 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (98W power charger) Ethernet LAN (RJ45): 1
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	USB 3.2 Type A Down Stream: 2 USB 3.2 Type B Up Stream: 1	USB 3.2 Type A Down Stream: 4 USB 3.2 Type B Up Stream: 1
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2	5Watts x2
Consumption (typical)	32.2W	38.53W
ECO Mode (Conserve / Optimized)	23.8W / 27.9W	32.29W / 35.21W
Ergonomic Design	Height Adjust (mm): 150 Swivel: 90° Tilt (Forward/Back): -5° / 20°	Height Adjust (mm): 110 Swivel: 120° Tilt (Forward/Back): -5° / 40°
Dimensions (mm)	808 x 381.92-531.92 x 235	807 x 423.4-533.4 x 217
Dimensions (Without stand) (mm)	808 x 363.92 x 118.29	807 x 388 x 116
Net Weight (kg)	7.9	9.1
Net Weight (without stand) (kg)	6	6.7
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star, EPEAT, TCO	Energy Star, EPEAT, TCO

Specifications

Ultrawide & Curve Monitors



MODEL NAME	VA3420C	VA3820C
Size / Panel Type	34" IPS	38" IPS
Resolution (Max.) / Ratio	3440 x 1440 / 21:9	3840 x 1600 / 21:9
Static Contrast Ratio (Typ.)	2,000:1	2,000:1
Dynamic Contrast Ratio	80M:1	50M:1
Brightness (Typ.)	300 cd/m ²	300 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Curvature	1900R	2300R
Response Time / Refresh Rate	1ms (MPRT) / 120Hz	5ms (Typical GTG) / 75Hz
Color Space Support	8 bit true	10 bit (8 bit + A-FRC)
Color Gamut (Typ.)	DCI-P3: 98% size NTSC: 94% size sRGB: 132% size	DCI-P3: 98% size NTSC: 95% size sRGB: 134% size / 100% coverage
Low Blue Light	Hardware solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	HDMI 2.0 (with HDCP 2.2): 2 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (96W power charger)	HDMI 2.0 (with HDCP 2.2): 2 DisplayPort: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 1 (96W power charger)
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
USB Hub	USB 3.2 Type A Down Stream (USB 2.0 Bandwidth): 2 USB 3.2 Type B Up Stream: 1	USB 3.2 Type A Down Stream (USB 2.0 Bandwidth): 2 USB 3.2 Type B Up Stream: 1
Power In	DC Socket (Center Positive)	DC Socket (Center Positive)
Speaker	2.5Watts x2	2.5Watts x2
Consumption (typical)	26W	32W
ECO Mode (Conserve / Optimized)	20W / 23W	26W / 29W
Ergonomic Design	Height Adjust (mm): 130 Swivel: 60° Tilt (Forward/Back): -5° / 15°	Height Adjust (mm): 130 Swivel: 60° Tilt (Forward/Back): -5° / 15°
Dimensions (mm)	814.7 x 424.66-554.66 x 237.8	897.5 x 377.2-507.2 x 237.8
Dimensions (Without stand) (mm)	814.7 x 363.56 x 102.65	897.5 x 398.5 x 105.9
Net Weight (kg)	8.2	9.4
Net Weight (without stand) (kg)	6.2	7.2
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	Energy Star	Energy Star



USB-C Portable Monitors

Productivity on the go with lightweight, versatile displays

ViewSonic portable monitors are designed for professionals who need productivity on the move. Slim, lightweight, and powered by USB-C, they deliver easy plug-and-play functionality with minimal clutter. Choose models such as the VA1650 for everyday tasks or the TD1655 for interactive touch control, collaboration, and presentations on the go.



Travel-Ready Portability

Lightweight and compact designs fit easily into any bag, making them ideal companions for remote work and travel.



One-Cable USB-C Setup

USB-C delivers power, audio, video, and data through a single cable for a neater, faster setup wherever work happens.



Flexible Device Support

Compatible with laptops, tablets, and smartphones* to provide extra screen space for multitasking, sharing, and presenting.

*Device must support DisplayPort over USB-C.

Learn more about how to find the right portable monitor for your needs:
[Finding The Right Portable Monitor for Laptop: What You Need to Know](#)

Specifications Portable Monitors



MODEL NAME	VA1650	TD1655
Size / Panel Type	16" IPS	16" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1,000:1	800:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V), CR>5 170° (H), 170° (V), CR>10
Response Time (Typical GTG) / Refresh Rate	7ms / 60Hz	6.5ms / 60Hz
Color Space Support	8 bit (6 bit + FRC)	6 bit true
Color Gamut (Typ.)	NTSC: 45% size sRGB: 64% size	NTSC: 45% size sRGB: 64% size
Blue Light Filter	Yes	Yes
Flicker Free	Yes	N/A
Touch Screen	N/A	Projected Capacitive, 10-point multi-touch
Surface Treatment	Anti-Glare, Hard Coating (3H)	Glossy w/ anti-finger print, Hard Coating(≥6H)
Cover Glass Thickness	N/A	0.8 mm
PC Operating System Compatibility	Windows 10/11 certified; macOS tested	Windows 10/11 certified; macOS tested
Connectivity	HDMI 1.4: 1 USB 3.2 Type C; DisplayPort Alt mode only: 1 (65W power charger)	Mini HDMI: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 2 (60W power charger)
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
Power In	USB Type C (power only)	USB Type C (with video & data)
Speaker	1Watts x2	0.8Watts x2
Consumption (typical)	7W	8W
ECO Mode (Conserve / Optimized)	6W /6.5W	6W / 6.9W
Dimensions (mm)	357.8 x 210.5 x 13.9	355.46 x 223.44 x 14.7
Net Weight (with stand) (kg)	0.7	0.96
VESA Compatible (mm)	Customized, 75 mm	N/A



Touchscreen Monitors

Interactive technology designed for work and collaboration

ViewSonic Touchscreen Monitors are designed to deliver intuitive interaction and responsive performance across professional, educational, and commercial environments. With advanced touchscreen options such as infrared and PCAP, these displays integrate easily into diverse setups to enhance productivity, engagement, and user experience.

Built for durability and flexibility, ViewSonic touchscreens support a wide range of applications, from collaborative workspaces to customer-facing installations, setting the stage for the touch technologies detailed in the following section.



Easy Implementation

Our touchscreen monitors are hardware and software ready, making it easier for your business to get up and running.



Increased Efficiency

Improve your operations by eliminating unnecessary paperwork and modernizing procedures.



Enhanced User Experience

Displaying engaging content for consumer interaction helps to elevate your business.



Infrared Touch Technology (IR)

Infrared touch technology uses light beams across the screen to detect precise touch points with fingers, gloves, or other objects. It delivers high accuracy without pressure on the screen, making it simple and responsive to use. IR touch is widely used in kiosks, information desks, and industrial control rooms where reliability is essential.

Pros:

- Supports multi-touch (up to 10 points)
- Can use any object to activate touch
- High precision touch

Cons:

- May be less reliable in dirty or bright environments
- Requires a bezel to hide IR hardware

Specifications IR Touch Monitors



MODEL NAME	TD2223	TD2423
Size / Panel Type	22" VA	24" VA
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	3,000:1	3,000:1
Dynamic Contrast Ratio	20M:1	20M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typical GTG) / Refresh Rate	6.5ms / 75Hz	7ms / 75Hz
Color Space Support	8 bit true	8 bit (6 bit + Hi-FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Blue Light Filter	Yes	Yes
Flicker Free	Yes	Yes
Surface Treatment	Glossy, Hard Coating (7H)	Glossy, Hard Coating (7H)
Cover Glass Thickness	2 mm	1.85 mm
PC Operating System Compatibility	Windows 10/11 certified; macOS tested	Windows 7/8.1/10/11 certified; macOS tested
Connectivity	VGA: 1 HDMI 1.4: 1 DVI-D: 1	VGA: 1 HDMI 1.4: 1 DVI-D: 1
Audio In / Out	3.5mm Audio In: 1 3.5mm Audio Out: 1	3.5mm Audio In: 1 3.5mm Audio Out: 1
USB Hub	USB 2.0 Type-B Upstream: 1 USB 2.0 Type-A Downstream: 2	USB 2.0 Type-B Upstream: 1 USB 2.0 Type-A Downstream: 2
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2	2Watts x2
Consumption (typical)	18.5W	15.5W
ECO Mode (Conserve / Optimized)	13W / 16W	11.5W / 13.5W
Dimensions (mm)	519 x 329 x 101	571 x 348 x 101
Dimensions Without Stand (mm)	519 x 308 x 61	571 x 348 x 61
Net Weight (kg)	4.2	5.2
Net Weight without stand (kg)	3.7	4.7
VESA Compatible (mm)	100 x 100	100 x 100

Projected Capacitive Touch Technology (PCAP)

PCAP touch technology senses touch through changes in electrical charge, delivering high precision and fast response. These panels are scratch-resistant, support multi-touch, and provide a smooth, reliable user experience. PCAP is widely used in POS systems, kiosks, retail, and healthcare environments where accuracy and responsiveness matter most.

Pros:

- Highly responsive and smooth, with higher resolution than IR or Resistive
- Supports multi-touch (up to 10 points)
- Can be integrated into thin glass displays (phones, tablets, laptops)
- Widely adopted across devices

Cons:

- Requires a conductive stylus



Specifications

PCAP Touch Monitors



MODEL NAME	TD1630-3	TD1655
Touch Screen	Projected Capacitive, 10-point multi-touch	Projected Capacitive, 10-point multi-touch
Size / Panel Type	16" TN	16" IPS
Resolution (Max.) / Ratio	1366 x 768 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	500:1	800:1
Dynamic Contrast Ratio	10M:1	50M:1
Brightness (Typ.)	190 cd/m ²	250 cd/m ²
Viewing Angle	90° (H), 60° (V)	178° (H), 178° (V), CR>5 170° (H), 170° (V), CR>10
Response Time (Typ GTG) / Refresh Rate	N/A / 60Hz	6.5ms / 60Hz
Color Space Support	6 bit true	6 bit true
Color Gamut (Typ.)	NTSC: 45% size sRGB: 67% size	NTSC: 45% size sRGB: 64% size
Blue Light Filter	Yes	Yes
Flicker Free	N/A	N/A
Surface Treatment	Glossy, Hard Coating (7H)	Glossy w/ anti-finger print, Hard Coating (≥6H)
Cover Glass Thickness	0.83 mm	0.8 mm
PC Operating System Compatibility	Windows 7/8/8.1/10/11 certified; macOS tested	Windows 10/11 certified; macOS tested
Connectivity	VGA: 1 HDMI 1.4: 1 USB 2.0 Type-B Upstream: 1	Mini HDMI: 1 USB 3.2 Type C Up Stream; DisplayPort Alt mode : 2 (60W power charger)
Audio In / Out	3.5mm Audio In: 1	3.5mm Audio Out
USB Hub	N/A	N/A
Power In	DC Socket (Center Positive)	USB Type C (with video & data)
Speaker	1Watts x2	0.8Watts x2
Consumption (typical)	6W	8W
ECO Mode (Conserve / Optimized)	4.3W / 4.9W	6W / 6.9W
Dimensions (mm)	379 x 247 x 37	355.46 x 223.44 x 14.7
Dimensions Without Stand (mm)	379 x 247 x 37	355.46 x 223.44 x 14.7
Net Weight (kg)	1.3	0.96
Net Weight without stand (kg)	1.3	0.96
VESA Compatible (mm)	75 x 75	N/A

Specifications

PCAP Touch Monitors



MODEL NAME	TD2230	TD2430
Touch Screen	Projected Capacitive, 10-point multi-touch	Projected Capacitive, 10-point multi-touch
Size / Panel Type	22" IPS	24" VA
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1000:1	3,000:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	200 cd/m ²	200 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typ GTG) / Refresh Rate	5ms / 60Hz	10ms / 60Hz
Color Space Support	8 bit (6 bit+Hi-FRC)	8 bit (6 bit + Hi-FRC)
Color Gamut (Typ.)	NTSC: 77% size sRGB: 108% size	NTSC: 72% size sRGB: 104% size
Blue Light Filter	Yes	Yes
Flicker Free	Yes	Yes
Surface Treatment	Glossy, Hard Coating (7H)	Glossy, Hard Coating (7H)
Cover Glass Thickness	0.7 mm	1.8 mm
PC Operating System Compatibility	Windows 7/8/8.1/10/11 certified; macOS tested	Windows 8/10/11 certified; macOS tested
Connectivity	VGA: 1 HDMI 1.4: 1 DisplayPort: 1	VGA: 1 HDMI 1.4: 1 DisplayPort: 1
Audio In / Out	3.5mm Audio In: 1 3.5mm Audio Out: 1	3.5mm Audio In: 1 3.5mm Audio Out: 1
USB Hub	USB 3.2 Type-B Upstream: 1 USB 3.2 Type-A Downstream: 2	USB 3.2 Type-B Upstream: 1 USB 3.2 Type-A Downstream: 2
Power In	DC Socket (Center Positive)	DC Socket (Center Positive)
Speaker	3Watts x2	2Watts x2
Consumption (typical)	20 w/ ES 7.0; 25 w/o ES 7.0W	25W
ECO Mode (Conserve / Optimized)	16 w/ ES 7.0; 19 w/o ES 7.0W 18 w/ ES 7.0; 22 w/o ES 7.0W	19W / 22W
Dimensions (mm)	490 x 299 x 47	573 x 353 x 47
Dimensions Without Stand (mm)	490 x 299 x 47	573 x 353 x 47
Net Weight (kg)	3.6	5.5
Net Weight without stand (kg)	3.6	5.5
VESA Compatible (mm)	100 x 100	100 x 100

Specifications

PCAP Touch Monitors




MODEL NAME	TD2465	TD2760
Touch Screen	Projected Capacitive, 10-point multi-touch	Projected Capacitive, 10-point multi-touch
Size / Panel Type	24" VA	27" VA
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	4,000:1	3,000:1
Dynamic Contrast Ratio	20M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time (Typ GTG) / Refresh Rate	7ms / 100Hz	6ms / 60Hz
Color Space Support	8 bit (6 bit + Hi-FRC)	8 bit (6 bit + Hi-FRC)
Color Gamut (Typ.)	NTSC: 86% size sRGB: 122% size	NTSC: 72% size sRGB: 102% size
Blue Light Filter	Yes	Yes
Flicker Free	Yes	Yes
Surface Treatment	Glossy, Hard Coating (7H)	Anti-Glare, Hard Coating (≥6H)
Cover Glass Thickness	1.2 mm	1.88 mm
PC Operating System Compatibility	Windows 10/11 certified; macOS tested	Windows 7/8/8.1/10/11 certified; macOS tested
Connectivity	VGA: 1 HDMI 1.4: 1 DisplayPort: 1	VGA: 1 HDMI 1.4: 1 DisplayPort: 1 RS232 In: 1
Audio In / Out	3.5mm Audio In: 1 3.5mm Audio Out: 1	3.5mm Audio In: 1 3.5mm Audio Out: 1
USB Hub	USB 3.2 Type-B Upstream: 1 USB 3.2 Type-A Downstream: 2	USB 3.2 Type-B Upstream: 1 USB 3.2 Type-A Downstream: 2
Power In	3-pin Socket (IEC C14 / CEE22)	3-pin Socket (IEC C14 / CEE22)
Speaker	2Watts x2	2Watts x2
Consumption (typical)	15.5W	26W
ECO Mode (Conserve / Optimized)	11.5W / 13.5W	19W / 22W
Dimensions (mm)	571 x 348 x 101	660 x 443 x 239
Dimensions Without Stand (mm)	571 x 348 x 61	660 x 410 x 58
Net Weight (kg)	5.2	7.9
Net Weight without stand (kg)	4.7	5.5
VESA Compatible (mm)	100 x 100	100 x 100

VA Series Essential Monitors

Reliable performance for everyday productivity

The ViewSonic VA Series is built for users who need reliable performance and the core features for everyday work. With crisp visuals, energy-efficient operation, and a variety of screen sizes, these monitors deliver consistent quality across home, office, and educational environments.

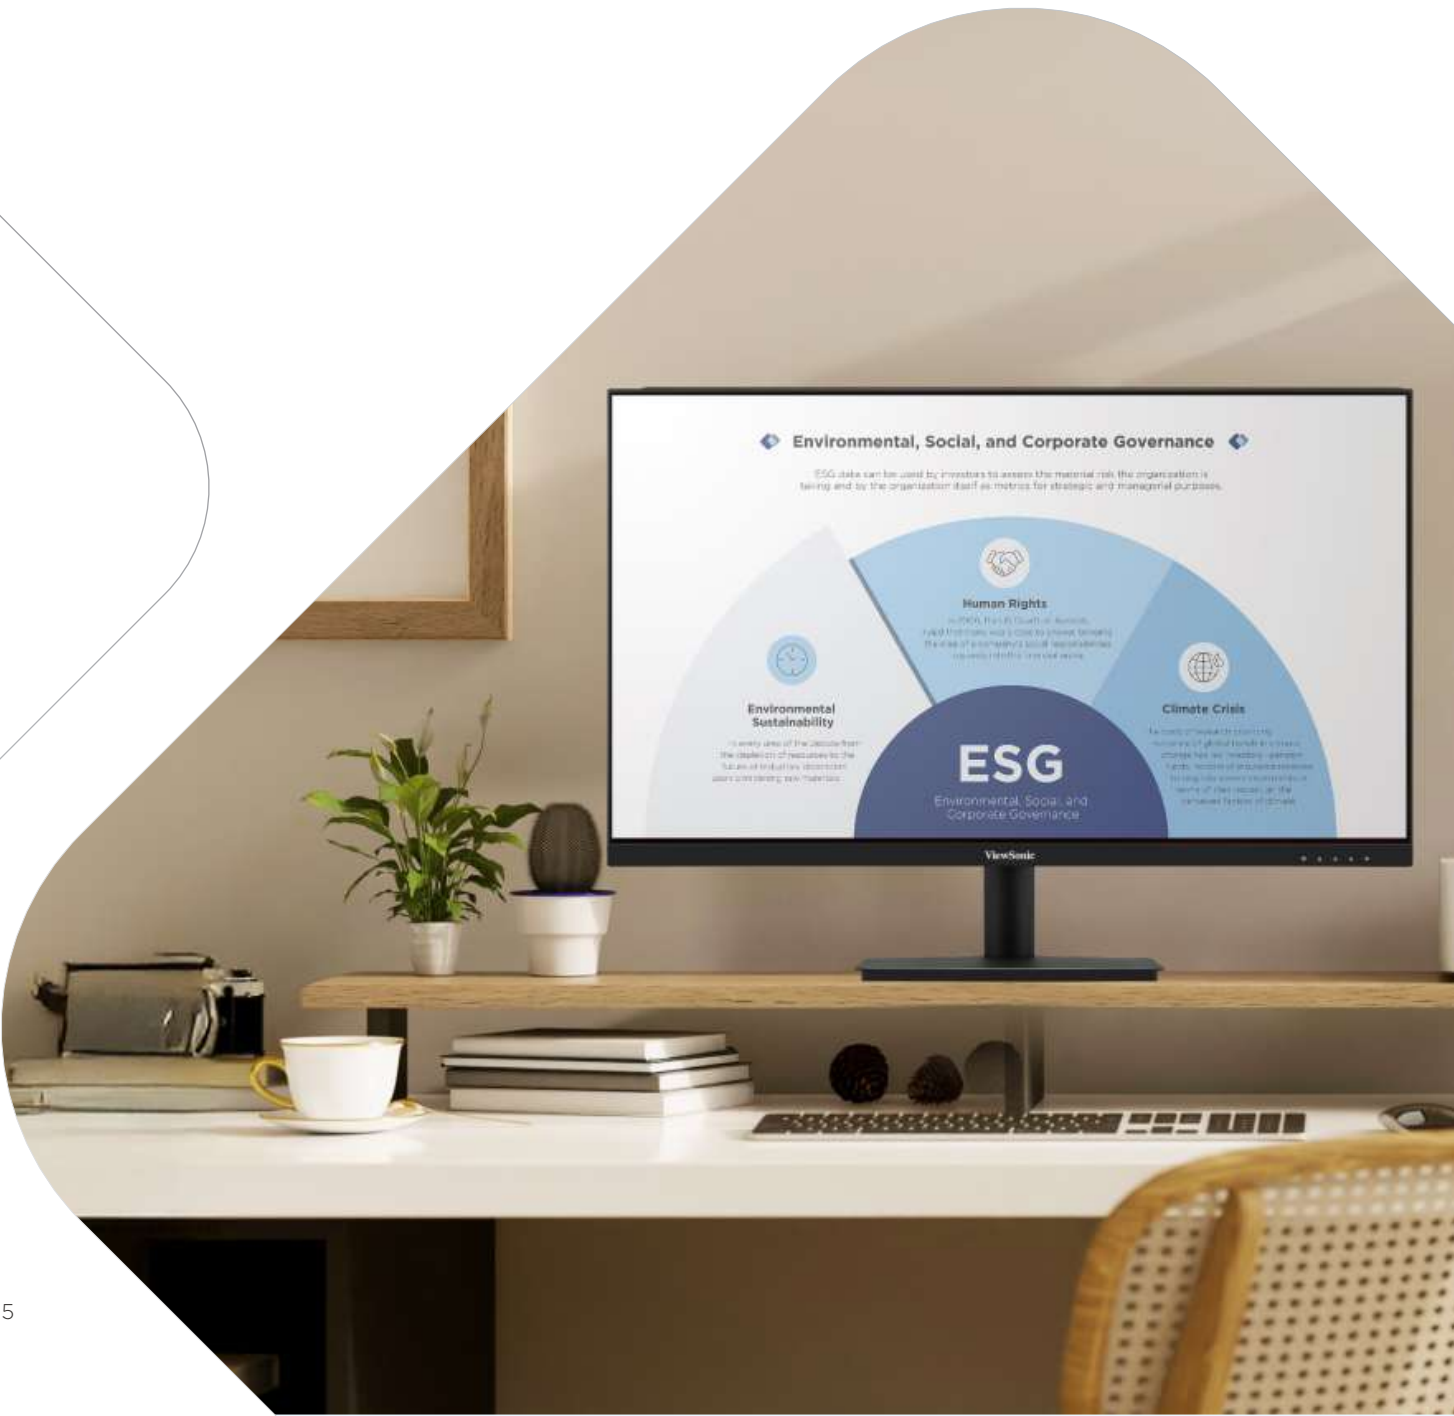

Specifications

VA Series Essential Models



MODEL NAME	VA220-H	VA240-H-2
Size / Panel Type	22" VA	24" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	4,000:1	1,000:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time / Refresh Rate	1ms (MPRT) / 100Hz	1ms (MPRT) / 75Hz
Color Space Support	8 bit true	8 bit (6 bit + Hi-FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 HDMI 1.4: 1	VGA: 1 HDMI 1.4: 1
Audio In / Out	N/A	N/A
Power In	DC Socket (Center Positive)	DC Socket (Center Positive)
Speaker	N/A	N/A
Consumption (typical)	20W	20W
ECO Mode (Conserve / Optimized)	16W / 18W	16W / 18W
Ergonomic Design	Tilt (Forward/Back): -3° / 15°	Tilt (Forward/Back): -3° / 15°
Dimensions (mm)	495.01 x 381.94 x 188.97	539.8 x 415.32 x 188.97
Dimensions (Without stand) (mm)	495.01 x 286.98 x 50.68	539.8 x 324.3 x 51.01
Net Weight (kg)	2.5	2.9
Net Weight (without stand) (kg)	2.1	2.6
VESA Compatible (mm)	75 x 75	75 x 75
Environmental Standards	N/A	N/A

Specifications

VA Series Essential Models



MODEL NAME	VA24E2-H	VA2408-HDJ
Size / Panel Type	24" IPS	24" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1,500:1	1,300:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time / Refresh Rate	4ms (Typ GTG) / 144Hz	1ms (MPRT) / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
Color Gamut (Typ.)	NTSC: 80% size sRGB: 112% size / 99% coverage	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 HDMI 1.4: 1	VGA: 1 HDMI 1.4: 1 DisplayPort: 1
Audio In / Out	N/A	3.5mm Audio Out
Power In	DC Socket (Center Positive)	3-pin Socket (IEC C14 / CEE22)
Speaker	N/A	N/A
Consumption (typical)	19W	16W
ECO Mode (Conserve / Optimized)	13W / 16W	12W / 14W
Ergonomic Design	Tilt (Forward/Back): -5° / 20°	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -5° / 28° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	540.45 x 405.88 x 205.21	542 x 386.2-516.2 x 223
Dimensions (Without stand) (mm)	540.45 x 322.05 x 35.95	542 x 323 x 44
Net Weight (kg)	2.7	5.2
Net Weight (without stand) (kg)	2.4	3.2
VESA Compatible (mm)	75 x 75	100 x 100
Environmental Standards	N/A	EPEAT, TCO

Specifications

VA Series Essential Models



MODEL NAME	VA2432-H-2	VA2432-MHD-3
Size / Panel Type	24" IPS	24" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1,300:1	1,300:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time / Refresh Rate	1ms (MPRT) / 100Hz	1ms (MPRT) / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 HDMI 1.4: 1	VGA: 1 HDMI 1.4: 1 DisplayPort: 1
Audio In / Out	N/A	3.5mm Audio Out: 1
Power In	DC Socket (Center Positive)	DC Socket (Center Positive)
Speaker	N/A	2Watts x2
Consumption (typical)	19W	19W
ECO Mode (Conserve / Optimized)	13W / 16W	13W / 16W
Ergonomic Design	Tilt (Forward/Back): -3° / 20°	Tilt (Forward/Back): -3° / 20°
Dimensions (mm)	540.45 x 406.05 x 185	540.45 x 406.05 x 185
Dimensions (Without stand) (mm)	540.45 x 322.05 x 35.95	540.45 x 322.05 x 35.95
Net Weight (kg)	2.7	2.7
Net Weight (without stand) (kg)	2.4	2.4
VESA Compatible (mm)	75 x 75	75 x 75
Environmental Standards	N/A	N/A

Specifications

VA Series Essential Models



MODEL NAME	VA270-H-2	VA2708-HDJ
Size / Panel Type	27" IPS	27" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Static Contrast Ratio (Typ.)	1,000:1	1,300:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	300 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time / Refresh Rate	1ms (MPRT) / 100Hz	5ms (Typ GTG) / 100Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
Color Gamut (Typ.)	NTSC: 77% size sRGB: 109% size	NTSC: 77% size sRGB: 109% size / 99% coverage
Low Blue Light	Software solution	Hardware solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 HDMI 1.4: 1	VGA: 1 HDMI 1.4: 1 DisplayPort: 1
Audio In / Out	N/A	3.5mm Audio Out
Power In	DC Socket (Center Positive)	3-pin Socket (IEC C14 / CEE22)
Speaker	N/A	N/A
Consumption (typical)	28W	19W
ECO Mode (Conserve / Optimized)	22W / 25W	14W / 16W
Ergonomic Design	Tilt (Forward/Back): -3° / 20°	Height Adjust (mm): 130 Swivel: 360° Tilt (Forward/Back): -5° / 28° Pivot (Right/Left): 90° / 90°
Dimensions (mm)	615.07 x 455.65 x 188.73	615 x 407.38-537.38 x 223
Dimensions (Without stand) (mm)	615.07 x 364.1 x 47.96	615 x 363.8 x 46
Net Weight (kg)	3.5	6.1
Net Weight (without stand) (kg)	3.1	4.1
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	N/A	EPEAT, TCO

Specifications

VA Series Essential Models



MODEL NAME	VA2708-2K-HD-2	VA2708-4K-HD
Size / Panel Type	27" IPS	27" IPS
Resolution (Max.) / Ratio	2560 x 1440 / 16:9	3840 x 2160 / 16:9
Static Contrast Ratio (Typ.)	1,000:1	1,200:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	300 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time / Refresh Rate	4ms (Typ GTG) / 75Hz	4ms (Typ GTG) / 60Hz
Color Space Support	8 bit (6 bit + FRC)	10 bit (8 bit + FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	HDMI 2.0 (with HDCP 2.2): 2 DisplayPort: 1	HDMI 2.0 (with HDCP 2.2): 2 DisplayPort: 1
Audio In / Out	3.5mm Audio Out: 1	3.5mm Audio Out: 1
Power In	DC Socket (Center Positive)	DC Socket (Center Positive)
Speaker	N/A	N/A
Consumption (typical)	29W	28W
ECO Mode (Conserve / Optimized)	18W / 22W	21W / 26W
Ergonomic Design	Tilt (Forward/Back): -5° / 20°	Tilt (Forward/Back): -5° / 15°
Dimensions (mm)	615.07 x 455.46 x 210	613.19 x 449.89 x 190
Dimensions (Without stand) (mm)	615.07 x 364.1 x 47.96	613.19 x 362.99 x 52.74
Net Weight (kg)	3.5	4.1
Net Weight (without stand) (kg)	3.1	3.3
VESA Compatible (mm)	100 x 100	75 x 75
Environmental Standards	N/A	N/A

Specifications

VA Series Essential Models



MODEL NAME	VA2732-H-2	VA3208-4K-HD
Size / Panel Type	27" IPS	32" VA
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	3840 x 2160 / 16:9
Static Contrast Ratio (Typ.)	1,300:1	3,000:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	300 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time / Refresh Rate	1ms (MPRT) / 100Hz	4ms (Typ GTG) / 60Hz
Color Space Support	8 bit (6 bit + FRC)	8 bit true
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 HDMI 1.4: 1	HDMI 2.0 (with HDCP 2.2): 2 DisplayPort: 1
Audio In / Out	N/A	3.5mm Audio Out: 1
Power In	DC Socket (Center Positive)	DC Socket (Center Positive)
Speaker	N/A	N/A
Consumption (typical)	20W	40W
ECO Mode (Conserve / Optimized)	13W / 17W	25W / 33W
Ergonomic Design	Tilt (Forward/Back): -3° / 20°	Tilt (Forward/Back): -5° / 20°
Dimensions (mm)	615 x 458.8 x 225	714.3 x 520.3 x 231
Dimensions (Without stand) (mm)	615 x 363.8 x 46	714.3 x 427.48 x 59.22
Net Weight (kg)	4.1	6.6
Net Weight (without stand) (kg)	3.6	5.5
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	N/A	N/A

Specifications

VA Series Essential Models



MODEL NAME	VA3209-MH	VA3209-2K-MHD
Size / Panel Type	32" IPS	32" IPS
Resolution (Max.) / Ratio	1920 x 1080 / 16:9	2560 x 1440 / 16:9
Static Contrast Ratio (Typ.)	1,200:1	1,200:1
Dynamic Contrast Ratio	50M:1	50M:1
Brightness (Typ.)	250 cd/m ²	250 cd/m ²
Viewing Angle	178° (H), 178° (V)	178° (H), 178° (V)
Response Time / Refresh Rate	4ms (Typ GTG) / 75Hz	4ms (Typ GTG) / 75Hz
Color Space Support	8 bit true	10 bit (8 bit + FRC)
Color Gamut (Typ.)	NTSC: 72% size sRGB: 104% size	NTSC: 72% size sRGB: 104% size
Low Blue Light	Software solution	Software solution
Flicker Free	Yes	Yes
Connectivity	VGA: 1 HDMI 1.4: 1	HDMI 1.4: 2 DisplayPort: 1
Audio In / Out	3.5mm Audio Out	3.5mm Audio Out
Power In	DC Socket (Center Positive)	DC Socket (Center Positive)
Speaker	2.5Watts x2	2.5Watts x2
Consumption (typical)	32W	37W
ECO Mode (Conserve / Optimized)	23W / 27W	24W / 30W
Ergonomic Design	Tilt (Forward/Back): -5° / 20°	Tilt (Forward/Back): -5° / 20°
Dimensions (mm)	714 x 520 x 231	714 x 520 x 231
Dimensions (Without stand) (mm)	714 x 428 x 59	714 x 428 x 59
Net Weight (kg)	6.8	6.8
Net Weight (without stand) (kg)	5.5	5.6
VESA Compatible (mm)	100 x 100	100 x 100
Environmental Standards	N/A	N/A

Top Monitor Brand 2025

ViewSonic, a leading global provider of visual solutions, recognized as one of PCMag's Best 25 Tech Brands for 2025.



Trusted Worldwide for Quality, Innovation, and Customer Care

For over 35 years, ViewSonic has delivered reliable display solutions worldwide. Our innovation and R&D ensure we meet real-world needs with the right technology at the right time. Today, ViewSonic is a trusted choice for professionals, businesses, and educators across the globe.

Decades of Expertise

Backed by 35+ years of leadership in visual solutions, we continue to shape how the world connects, collaborates, and creates.

Global Presence

Operating in over 100 countries, we bring our world-class solutions to businesses everywhere.

Customer Care

Customer success and satisfaction drive everything we do, with our expert teams supporting businesses every step of the way.



ViewSonic: Committed to Sustainable Solutions

ViewSonic leads the way in sustainable innovation, showcasing a strong commitment to reducing greenhouse gas emissions with SBTi validation for achieving Net-Zero emissions by 2050 and ISO 14064 certification. As a pioneer in energy efficiency, ViewSonic incorporates eco-friendly practices into its products and solutions, empowering businesses to optimize energy use and meet their sustainability objectives.

Our VG Series reflects this commitment:

Eco-Friendly Packaging:

Made from 100% recyclable materials with reduced plastic and mono-color printing for easier disposal and lower environmental impact.

Certified for Sustainability:

Complies with leading eco-standards including ENERGY STAR®, TCO, and EPEAT®, helping businesses meet ESG goals.

Disclaimer: Certification standards and packaging practices may vary by model. Please refer to individual product specifications for accurate details on applicable certifications and eco-friendly packaging.

The ViewSonic WorkPro Collection

Your Workspace. Your Way.



ViewSonic Region Operations

ViewSonic Office Location

Put Your Address Here Put Your Address

Put Your Address Here Put Your Address

Tel: 012-345-6-7890-1234 (operator)

Fax: 012-345-6-7890-1234 (9th fl. / exec. office)

Copyright

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All specifications are subject to change without written notice. Images are for illustrative purpose only. Offers and programs may vary by country. Please contact your local ViewSonic office for more information.
Copyright © ViewSonic Corporation 2000-2025 . All rights reserved.

